Cordset Part Number Key

Part Number Keys are to assist in IDENTIFICATION ONLY. Consult factory for catalog items not identified.

P	K	G		3	Z	-	P7X2	*	/S..

M8 Picofast Cordset

Gender

K = female connector
S = male connector

Configuration

G = straight
W = right angle

Coupling Nut (Threaded coupling nut only)

(blank) = nickel plated brass
V = Stainless steel
S = Shielded to coupling nut

Number of Wires / AWG / Color Codes

3 = 3x24 AWG BN, BU, BK
4 = 4x26 AWG BN, BU, BK, WH
6 = 6x26 AWG BN, BU, BK, WH, GY, PK

Locking Method

(blank) = male snap lock (no locking sleeve)
Z = female snap lock (locking sleeve)
M = M8x1 threaded coupling nut
F = fixed thread (3-pin male only)

Extension Examples:

Hybrid connector extensions also available. Consult factory.

Varieties

(blank) = PVC jacket
/S90 = TPU jacket
/S90-SP = TPU coil cord
/S90/S101 = TPU jacket, Flexlife-20
/S90/S618 = TPU jacket with foil shield and drain wire
/S90/S653 = TPU jacket with foil shield and drain wire
/S760 = PVC black jacket
/S .. = consult factory, special
/CS .. = consult factory, special

Insertion Point of Extension Cable and Second Prefix*

* Female connector listed first, male connector second
Example: **PKG 3M-2-PSG 3M**

Length in Meters

LED Options

(blank) = No LEDs
P7X2 = 2 LEDs with sourcing (PNP) signal and power
N7X2 = 2 LEDs with sinking (NPN) signal and power

Extension Examples:

Hybrid connector extensions also available. Consult factory.



P	K	G		3M	-	2	-	P	S	G		3M

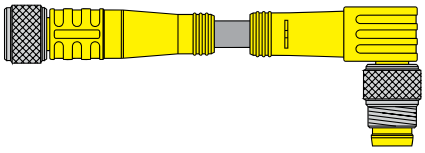

P	K	G		3M	-	2	-	P	S	W		3M



P	K	W		3M	-	2	-	P	S	G		3M



R	K		4.4	T	-	2	-	P	K	G		4M

Receptacle Part Number Key

Part Number Keys are to assist in IDENTIFICATION ONLY. Consult factory for catalog items not identified.

M8 Picofast Receptacle
- M = straight
- WM = right angle (PCB pins)

Designator for Receptacle

Gender
- K = female connector
- S = male connector

Connection Type
- (blank) = snap lock
- S = threaded
- SH = threaded and mounting bracket
- SHL = threaded and long mounting bracket

Connection Type / Length in Meters
- PCB = PCB pins
- PCBF = PCB pins

Mounting Style
- (blank) = front mount (rear thread and locknut)
- F = rear mount (front thread and locknut)

Number of Wires / AWG / Color Codes
- 3 = 3x26 AWG BN, BU, BK
- 4 = 4x26 AWG BN, BU, BK, WH
- 6 = 6x26 AWG BN, BU, BK, WH, GY, PK

Field Wireable Part Number Key

Field Wireable Type
- B = standard field wireable

Gender
- (Blank) = female connector
- S = male connector

M8 Picofast Field Wireable

Housing Style
- 1 = straight
- 2 = right angle

Cable Option
- 0 = no cable

Termination
- 1 = threaded connector
- 2 = snap lock
- 3 = threaded with screw terminal
- 6 = IDC

Number of Pins
- 3 = 3
- 4 = 4

3-Wire Cordsets, Snap Lock (Locking Sleeve)

- NEMA 1, 3, 4, 6P
- IEC IP67 Protection
- 125 V, 4 A

Connector Style	Female Part Number	Male Part Number	Features	Pinout	
PKG ..Z** 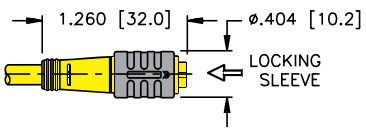	**PKG 3Z-* PKW 3Z-***	**PSG 3-* PSW 3-***	AWM, PVC Yellow, 3x24 AWG, 105 °C, 4.4 mm OD, Cable #RF50642-*M, Flexlife®	1. BN 3. BU 4. BK	Female 
PKW ..Z** 	**PKG 3Z-*/S90 PKW 3Z-*/S90**	**PSG 3-*/S90 PSW 3-*/S90**	AWM, TPU Black, 3x24 AWG, 90 °C, 4.2 mm OD, Cable #RF50587-*M, Cut/Abrasion Immune		
	PKG 3Z-*/S90/S101 PKW 3Z-*/S90/S101	**PSG 3-*/S90/S101 PSW 3-*/S90/S101**	AWM, TPU Black, 3x24 AWG, 90 °C, 4.4 mm OD, Cable #RF51166-*M, Cut/Abrasion Immune, Flexlife-20, High Flex - Over 20 Million Cycles		
PSG .. 	**PKG 3Z-*/S90/S618 PKW 3Z-*/S90/S618**	**PSG 3-*/S90/S618 PSW 3-*/S90/S618**	AWM, TPU Black, 3x24 AWG, 90 °C, 4.2 mm OD, Cable #RF50601-*M, Cut/Abrasion Immune, EMI/RFI Protection		Male 
PSW .. 	**PKG 3Z-*/S760 PKW 3Z-*/S760**	**PSG 3-*/S760 PSW 3-*/S760**	AWM, PVC Black, 3x24 AWG, 105 °C, 4.2 mm OD, Cable #RF50585-M, Flexlife		

* Length in meters. Standard cable lengths are 2, 4, 5, 6, 8 and 10 meters.
** Locking sleeve material is POM.."PKG..Z".

We reserve the right to make technical alterations without prior notice.

4-Wire Cordsets, Snap Lock (Locking Sleeve)

- NEMA 1, 3, 4, 6P
- IEC IP67 Protection
- 125 V, 2 A

Connector Style	Female Part Number	Male Part Number	Features	Pinout	
PKG ..Z** 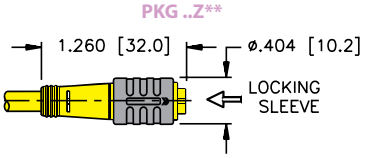	**PKG 4Z-*** **PKW 4Z-***	**PSG 4-*** **PSW 4-***	AWM, PVC Yellow, 4x26 AWG, 105 °C, 4.4 mm OD, Cable #RF50697-*M, Flexlife®	1. BN 2. WH 3. BU 4. BK	Female 
	PKG 4Z-*/S90 **PKW 4Z-*/S90**	**PSG 4-*/S90** **PSW 4-*/S90**	AWM, TPU Black, 4x26 AWG, 90 °C, 4.2 mm OD, Cable #RF50586-*M, Cut/Abrasion Immune		
PKW ..Z** 	**PKG 4Z-*/S90/S101** **PKW 4Z-*/S90/S101**	**PSG 4-*/S90/S101** **PSW 4-*/S90/S101**	AWM, TPU Black, 4x26 AWG, 90 °C, 4.4 mm OD, Cable #RF50935-*M, Cut/Abrasion Immune, Flexlife-20, High Flex - Over 20 Million Cycles		
	PKG 4Z-*/S90/S618 **PKW 4Z-*/S90/S618**	**PSG 4-*/S90/S101** **PSW 4-*/S90/S101**	AWM, TPU Black, 4x26 AWG, 90 °C, 4.2 mm OD, Cable #RF50602-*M, Cut/Abrasion Immune, EMI/RFI Protection		
PSG .. 	**PKG 4Z-*/S760** **PKW 4Z-*/S760**	**PSG 4-*/S760** **PSW 4-*/S760**	AWM, PVC Black, 4x26 AWG, 105 °C, 4.4 mm OD, Cable #RF50870-*M, Flexlife		Male 
PSW .. 	**PKG 4Z-*/S90/S653** **PKW 4Z-*/S90/S653**	**PSG 4-*/S90/S653** **PSW 4-*/S90/S653**	AWM, TPU Black, 3x24 AWG, 90 °C, 4.2 mm OD, Cable #RF50601-*M, Cut/Abrasion Immune, EMI/RFI Protection	1. BN 2. Drain 3. BU 4. BK	

* Length in meters. Standard cable lengths are 2, 4, 5, 6, 8 and 10 meters.
** Locking sleeve material is POM.."PKG..Z".

We reserve the right to make technical alterations without prior notice.

6-Wire Cordsets, Snap Lock (Locking Sleeve)

- NEMA 1, 3, 4, 6P
- IEC IP67 Protection
- 125 V, 2 A

Connector Style	Female Part Number	Male Part Number	Features	Pinout	
PKG ..Z** 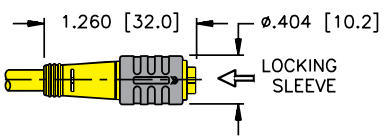	**PKG 6Z-* PKW 6Z-***	**PSG 6-* PSW 6-***	AWM, PVC Yellow, 6x26 AWG, 105 °C, 4.5 mm OD, Cable #RF50734-*M, Flexlife®, UL Listed	1. BN 2. WH 3. BU 4. BK 5. GY 6. PK	Female 
PKW ..Z** 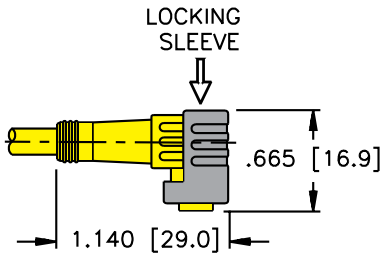	**PKG 6Z-*/S90 PKW 6Z-*/S90**	**PSG 6-*/S90 PSW 6-*/S90**	AWM, TPU Black, 6x26 AWG, 90 °C, 4.2 mm OD, Cable #RF50735-*M, Cut/Abrasion Immune		
PSG .. 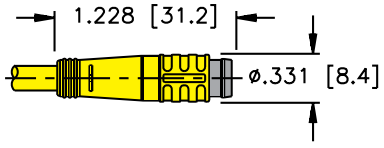	**PKG 6Z-*/S90/S618 PKW 6Z-*/S90/S618**	**PSG 6-*/S90/S618 PSW 6-*/S90/S618**	AWM, TPU Black, 6x26 AWG, 90 °C, 4.2 mm OD, Cable #RF51144-M, Cut/Abrasion Immune EMI/RFI Protection		Male 
PSW .. 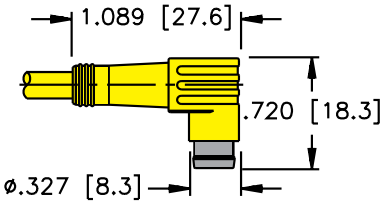	**PKG 6Z-*/S760 PKW 6Z-*/S760**	**PSG 6-*/S760 PSW 6-*/S760**	AWM, PVC Black, 6x26 AWG, 105 °C, 4.5 mm OD, Cable #RF51083-*M, Flexlife, UL Listed		

* Length in meters. Standard cable lengths are 2, 4, 5, 6, 8 and 10 meters.
** Locking sleeve material is POM.."PKG..Z".

We reserve the right to make technical alterations without prior notice.

TURCK

3-Wire Cordsets, Threaded Coupling Nut

- NEMA 1, 3, 4, 6P
- IEC IP67 Protection
- 125 V, 4 A

Connector Style	Female Part Number	Male Part Number	Features	Pinout	
PKG ..Z** 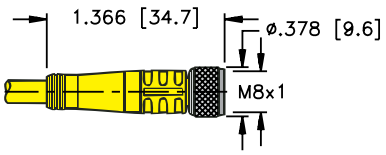	**PKG 3M-* PKW 3M-***	**PSG 3M-* PSW 3M-***	AWM, PVC Yellow, 3x24 AWG, 105 °C, 4.4 mm OD, Cable #RF50642-*M, Flexlife®	1. BN 3. BU 4. BK	Female 
	PKG 3M-*/S90 PKW 3M-*/S90	**PSG 3M-*/S90 PSW 3M-*/S90**	AWM, TPU Black, 3x24 AWG, 90 °C, 4.2 mm OD, Cable #RF50587-*M, Cut/Abrasion Immune		
PKW ..M** 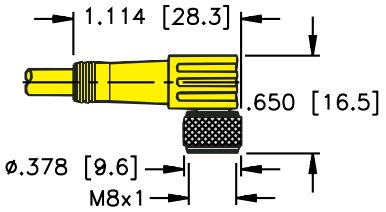	**PKG 3M-*/S90/S101 PKW 3M-*/S90/S101**	**PSG 3M-*/S90/S101 PSW 3M-*/S90/S101**	AWM, TPU Black, 3x24 AWG, 90 °C, 4.4 mm OD, Cable #RF51166-*M, Cut/Abrasion Immune, Flexlife-20, High Flex - Over 20 Million Cycles		
PSG .. M** 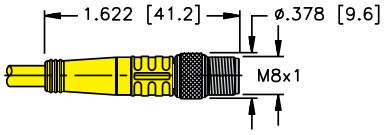	**PKG 3M-*/S90/S618 PKW 3M-*/S90/S618**	**PSG 3M-*/S90/S618 PSW 3M-*/S90/S618**	AWM, TPU Black, 3x24 AWG, 90 °C, 4.2 mm OD, Cable #RF50601-*M, Cut/Abrasion Immune, EMI/RFI Protection		
	PKG 3M-*/S1587 PKW 3M-*/S1587	**PSG 3M-*/S1587 PSW 3M-*/S1587**	AWM, TPE Yellow, 3x24 AWG, 105 °C, 4.4 mm OD, Cable #RF51271-*M, Weldlife®, Weld Flash Immune		
PSW .. M** 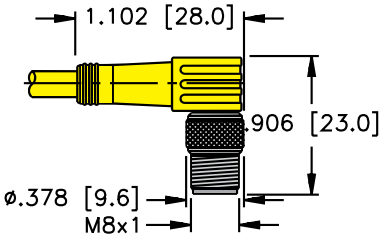	**PKG 3M-*/S760 PKW 3M-*/S760**	**PSG 3M-*/S760 PSW 3M-*/S760**	AWM, PVC Black, 3x24 AWG, 4.2 mm OD, Cable #RF50585-M, Flexlife	1. BN 3. BU 4. Drain	Male 
	PKG 3M-*/S90/S1084 PKW 3M-*/S90/S1084	**PSG 3M-*/S90/S1084 PSW 3M-*/S90/S1084**	AWM, TPU Black, 2x24 AWG, 90 °C, 4.2 mm OD, Cable #RF51197-*M, Cut/Abrasion Immune, Shielded	1. BN 3. BU 4. BK	
PSG 3F .. ** 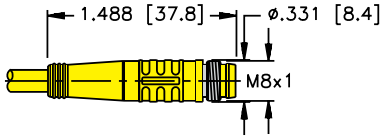		**PSG 3F-***	AWM, PVC Yellow, 3x24 AWG, 105 °C, 4.4 mm OD, Cable #RF50642-*M, Fixed coupling nut		

* Length in meters. Standard cable lengths are 2, 4, 5, 6, 8 and 10 meters.
** Standard coupling material is nickel plated brass.."PKG..M"; "PKGV..M" indicates stainless steel.

We reserve the right to make technical alterations without prior notice.

4-Wire Cordsets, Threaded Coupling Nut

- NEMA 1, 3, 4, 6P
- IEC IP67 Protection
- 125 V, 4 A

Connector Style	Female Part Number	Male Part Number	Features	Pinout	
PKG ..M** 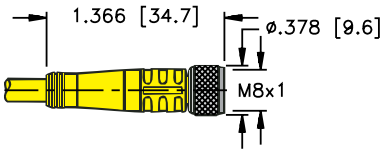	**PKG 4M-* PKW 4M-***	**PSG 4M-* PSW 4M-***	AWM PVC Yellow, 4x26 AWG, 105 °C, 4.4 mm OD, Cable #RF50697-*M, Flexlife®	1. BN 2. WH 3. BU 4. BK	Female 
	PKG 4M-*/S90 PKW 4M-*/S90	**PSG 4M-*/S90 PSW 4M-*/S90**	AWM TPU Black, 4x26 AWG, 90 °C, 4.2 mm OD, Cable #RF50586-*M, Cut/Abrasion Immune		
PKW ..M** 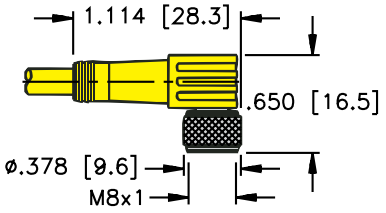	**PKG 4M-*/S90/S101 PKW 4M-*/S90/S101**	**PSG 4M-*/S90/S101 PSW 4M-*/S90/S101**	AWM TPU Black, 4x26 AWG, 90 °C, 4.4 mm OD, Cable #RF50935-*M, Cut/Abrasion Immune, Flexlife-20, High Flex - Over 20 Million Cycles		
PSG .. M** 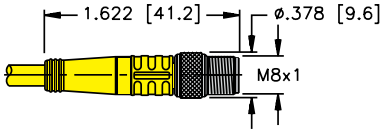	**PKG 4M-*/S90/S618 PKW 4M-*/S90/S618**	**PSG 4M-*/S90/S618 PSW 4M-*/S90/S618**	AWM TPU Black, 4x26 AWG, 90 °C, 4.2 mm OD, Cable #RF50602-*M, Cut/Abrasion Immune, EMI/RFI Protection		
	PKG 4M-*/S760 PKW 4M-*/S760	**PSG 4M-*/S760 PSW 4M-*/S760**	AWM PVC Black, 4x26 AWG, 105 °C, 4.4 mm OD, Cable #RF50870-*M, Flexlife		Male 
PSW .. M** 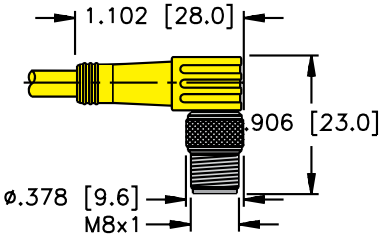	**PKG 4M-*/S90/S653 PKW 4M-*/S90/S653**	**PSG 4M-*/S90/S653 PSW 4M-*/S90/S653**	AWM TPU Black, 3x24 AWG, 90 °C, 4.2 mm OD, Cable #RF50601-*M, Cut/Abrasion Immune, EMI/RFI Protection	1. BN 2. Drain 3. BU 4. BK	

* Length in meters. Standard cable lengths are 2, 4, 5, 6, 8 and 10 meters.
** Standard coupling material is nickel plated brass.."PKG..M"; "PKGV..M" indicates stainless steel.

We reserve the right to make technical alterations without prior notice.

6-Wire Cordsets, Threaded Coupling Nut

- NEMA 1, 3, 4, 6P
- IEC IP67 Protection
- 125 V, 2 A

Connector Style	Female Part Number	Male Part Number	Features	Pinout	
PKG ..M** 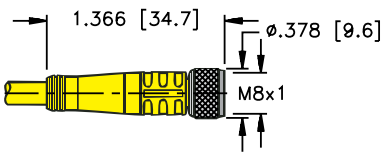	**PKG 6M-* PKW 6M-***	**PSG 6M-* PSW 6M-***	AWM PVC Yellow, 6x26 AWG, 105 °C, 4.5 mm OD, Cable #RF50734-*M, Flexlife®, UL Listed	1. BN 2. WH 3. BU 4. BK 5. GY 6. PK	Female 
PKW ..M** 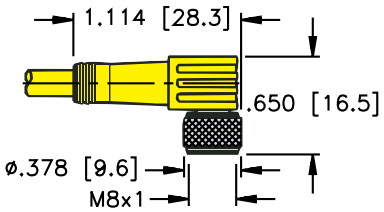	**PKG 6M-*/S90 PKW 6M-*/S90**	**PSG 6M-*/S90 PSW 6M-*/S90**	AWM TPU Black, 6x26 AWG, 90 °C, 4.2 mm OD, Cable #RF50735-*M, Cut/Abrasion Immune		
PSG .. M** 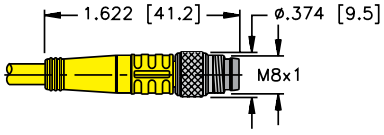	**PKG 6M-*/S760 PKW 6M-*/S760**	**PSG 6M-*/S760 PSW 6M-*/S760**	AWM PVC Black, 6x26 AWG, 105 °C, 4.5 mm OD, Cable #RF51083-*M, Flexlife, UL Listed		Male 
PSW .. M** 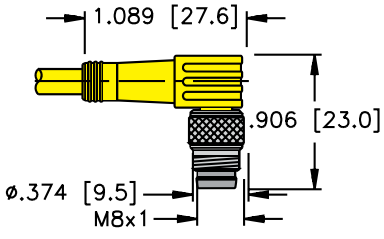	**PKG 6M-*/S90/S618 PKW 6M-*/S90/S618**	**PSG 6M-*/S90/S618 PSW 6M-*/S90/S618**	AWM TPU Black, 6x26 AWG, 90 °C, 4.2 mm OD, Cable #RF51144-*M, Cut/Abrasion Immune EMI/RFI Protection		

* Length in meters. Standard cable lengths are 2, 4, 5, 6, 8 and 10 meters.
** Standard coupling material is nickel plated brass.."PKG..M"; "PKGV..M" indicates stainless steel.

We reserve the right to make technical alterations without prior notice.

3 and 4-Wire Cordsets, Threaded Coupling Nut, Shielded

- **Shield to Coupling Nut**
- **IEC IP67 Protection**
- **125 V, 4 A (3-pin), 2 A (4-pin)**

Connector Style	Female Part Number	Male Part Number	Features	Pinout	
PKG ..M** 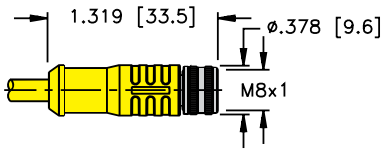	**PKGS 3M-*** **PKWS 3M-***	**PSGS 3M-*** **PSWS 3M-***	AWM, PVC Yellow, 3x24 AWG, 105 °C, 5.1 mm OD, Cable #RF51422-*M, RFI/EMI Shielding Tied to Coupling Nut	1. BN 3. BU 4. BK	Female 
PKW ..M** 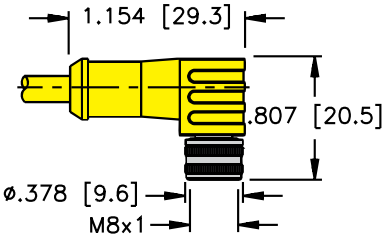	**PKGS 3M-*/S90** **PKWS 3M-*/S90**	**PSGS 3M-*/S90** **PSWS 3M-*/S90**	AWM, TPU Black, 3x24 AWG, 90 °C, 5.1 mm OD, Cable #RF51423-*M, RFI/EMI Shielding Tied to Coupling Nut		Male 
PSG .. M** 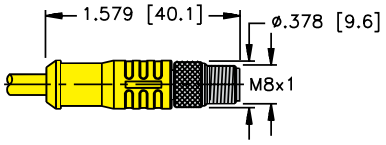	**PKGS 4M-*** **PKWS 4M-***	**PSGS 4M-*** **PSWS 4M-***	AWM, PVC Yellow, 4x26 AWG, 105 °C, 5.1 mm OD, Cable #RF51424-*M, RFI/EMI Shielding Tied to Coupling Nut	1. BN 2. WH 3. BU 4. BK	Female 
PSW .. M** 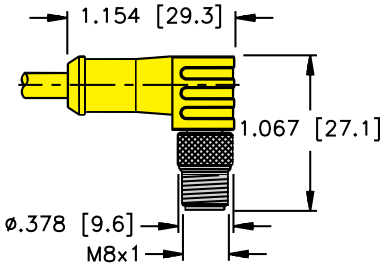	**PKGS 4M-*/S90** **PKWS 4M-*/S90**	**PSGS 4M-*/S90** **PSWS 4M-*/S90**	AWM, TPU Black, 4x26 AWG, 90 °C, 5.1 mm OD, Cable #RF51425-*M, RFI/EMI Shielding Tied to Coupling Nut		Male 

* Length in meters. Standard cable lengths are 2, 4, 6, 8 and 10 meters. Consult factory for other lengths.
** Standard coupling material is nickel plated brass.

We reserve the right to make technical alterations without prior notice.

3 and 4-Wire Cordsets, with LEDs, Snap Lock (Locking Sleeve)

- NEMA 1, 3, 4, 6P
- IEC IP67 Protection
- 10-30 VDC, 4 A (3-pin), 2 A (4-pin)

Connector Style	Female Part Number	Features	Pinout	
PKW ..Z** YELLOW (OUTPUT) GREEN (POWER) LOCKING SLEEVE .665 [16.9] 1.140 [29.0]	**PKW 3Z-P7X2-***	AWM PVC Yellow, 3x24 AWG, 105 °C, 4.4 mm OD, Cable #RF50642-*M, PNP Signal, Flexlife®	1. BN 3. BU 4. BK	Female 1 3 4
	PKW 3Z-P7X2-*/S90	AWM TPU Black, 3x24 AWG, 90 °C, 4.2 mm OD, Cable #RF50587-*M, PNP Signal, Cut/Abrasion Immune		
	PKW 3Z-P7X2-*/S90/S618	AWM TPU Black, 3x24 AWG, 90 °C, 4.2 mm OD, Cable #RF50601-*M, PNP Signal, Cut/Abrasion Immune, EMI/RFI Protection		
	PKW 3Z-P7X2-*/S90/S101	AWM TPU Black, 3x24 AWG, 90 °C, 4.4 mm OD, Cable #RF51166-*M, PNP Signal, Cut/Abrasion Immune, Flexlife-20, High Flex - over 20 Million Cycles		
	PKW 3Z-N7X2-*	AWM PVC Yellow, 3x24 AWG, 105 °C, 4.4 mm OD, Cable #RF50642-*M, NPN Signal, Flexlife		
	PKW 3Z-N7X2-*/S90	AWM TPU Black, 3x24 AWG, 90 °C, 4.2 mm OD, Cable #RF50587-*M, NPN Signal, Cut/Abrasion Immune		
	PKW 3Z-N7X2-*/S90/S618	AWM TPU Black, 3x24 AWG, 90 °C, 4.2 mm OD, Cable #RF50601-*M, NPN Signal, Cut/Abrasion Immune, EMI/RFI Protection		
	PKW 3Z-N7X2-*/S90/S101	AWM TPU Black, 3x24 AWG, 90 °C, 4.4 mm OD, Cable #RF51166-*M, NPN Signal, Cut/Abrasion Immune, Flexlife-20, High Flex - over 20 Million Cycles		
	PKW 4Z-P7X2-*	AWM PVC Yellow, 4x26 AWG, 105 °C, 4.4 mm OD, Cable #RF50697-*M, PNP Signal, Flexlife	1. BN 2. WH 3. BU 4. BK	Male 1 3 2 4
	PKW 4Z-P7X2-*/S90	AWM TPU Black, 4x26 AWG, 90 °C, 4.2 mm OD, Cable #RF50586-*M, PNP Signal, Cut/Abrasion Immune		
	PKW 4Z-P7X2-*/S90/S101	AWM TPU Black, 4x26 AWG, 90 °C, 4.4 mm OD, Cable #RF50935-*M, PNP Signal, Cut/Abrasion Immune, Flexlife-20, High Flex - Over 20 Million Cycles		

* Length in meters. Standard cable lengths are 2, 4, 6, 8 and 10 meters.
** Locking sleeve material is POM.."PKW..Z".

We reserve the right to make technical alterations without prior notice.

3 and 4-Wire Cordsets, Threaded Coupling Nut, Shielded

- NEMA 1, 3, 4, 6P
- IEC IP67 Protection
- 10-30 VDC, 4 A

Connector Style	Female Part Number	Male Part Number	Features	Pinout	
PKW ..M** 	**PKW 3M-P7X2-***	**PSW 3M-P7X2-***	AWM PVC Yellow, 3x24 AWG, 105 °C, 4.4 mm OD, Cable #RF50642-*M, PNP Signal, Flexlife®	1. BN 3. BU 4. BK	Female 
	PKW 3M-P7X2-*/S90	**PSW 3M-P7X2-*/S90**	AWM TPU Black, 3x24 AWG, 90 °C, 4.2 mm OD, Cable #RF50587-*M, PNP Signal, Cut/Abrasion Immune		
	PKW 3M-P7X2-*/S90/S101	**PSW 3M-P7X2-*/S90/S101**	AWM TPU Black, 3x24 AWG, 90 °C, 4.4 mm OD, Cable #RF51166-*M, PNP Signal, Cut/Abrasion Immune, Flexlife-20, High Flex - over 20 Million Cycles		
	PKW 3M-P7X2-*/S90/S618		AWM TPU Black, 3x24 AWG, 90 °C, 4.2 mm OD, Cable #RF50601-*M, PNP Signal, Cut/Abrasion Immune, EMI/RFI Protection		
	PKW 3M-N7X2-*		AWM PVC Yellow, 3x24 AWG, 105 °C, 4.4 mm OD, Cable #RF50642-*M, NPN Signal, Flexlife		
PSW .. M** 	**PKW 3M-N7X2-*/S90**		AWM TPU Black, 3x24 AWG, 90 °C, 4.2 mm OD, Cable #RF50587-*M, NPN Signal, Cut/Abrasion Immune		
	PKW 3M-N7X2-*/S90/S101		AWM TPU Black, 3x24 AWG, 90 °C, 4.4 mm OD, Cable #RF51166-*M, NPN Signal, Cut/Abrasion Immune, Flexlife-20, High Flex - over 20 Million Cycles		
	PKW 3M-N7X2-*/S90/S618		AWM TPU Black, 3x24 AWG, 90 °C, 4.2 mm OD, Cable #RF50601-*M, NPN Signal, Cut/Abrasion Immune, EMI/RFI Protection		

* Length in meters. Standard cable lengths are 2, 4, 6, 8 and 10 meters. Consult factory for other lengths.
** Standard coupling material is nickel plated brass.

We reserve the right to make technical alterations without prior notice.

4-Wire Cordsets, with LEDs, Threaded Coupling Nut

- NEMA 1, 3, 4, 6P
- IEC IP67 Protection
- 10-30 VDC, 2 A

Connector Style	Female Part Number	Features	Pinout	
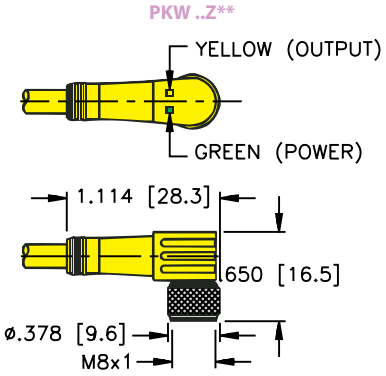	**PKW 4M-P7X2-***	AWM PVC Yellow, 4x26 AWG, 105 °C, 4.4 mm OD, Cable #RF50697-*M, PNP Signal, Flexlife®	1. BN 2. WH 3. BU 4. BK	**Female** 
	PKW 4M-P7X2-*/S90	AWM TPU Black, 4x26 AWG, 90 °C, 4.2 mm OD, Cable #RF50586-*M, PNP Signal, Cut/ Abrasion Immune		
	PKW 4M-P7X2-*/S90/S101	AWM TPU Black, 4x26 AWG, 90 °C, 4.4 mm OD, Cable #RF50935-*M, PNP Signal, Cut/ Abrasion Immune, Flexlife-20, High Flex - over 20 Million Cycles		
	PKW 4M-P7X2-*/S90/S618	AWM TPU Black, 4x26 AWG, 90 °C, 4.2 mm OD, Cable #RF50602-*M, PNP Signal, Cut/ Abrasion Immune, EMI/RFI Protection		

* Length in meters. Standard cable lengths are 2, 4, 6, 8 and 10 meters.
** Locking sleeve material is POM.."PKW..Z".

We reserve the right to make technical alterations without prior notice.

3 and 4-Wire Spiral Cordsets, Snap Lock (Locking Sleeve)

- NEMA 1, 3, 4, 6P
- IEC IP67 Protection
- 125 V, 4 A (3-pin) and 2 A (4-pin)

Connector Style	Female Part Number	Male Part Number	Features	Pinout	
PKG ..Z** 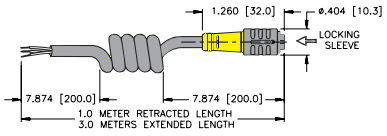 PKW ..Z** 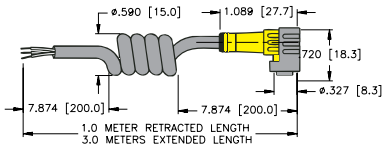	**PKG 3Z-3/S90-SP** **PKW 3Z-3/S90-SP**	**PSG 3-3/S90-SP** **PSW 3-3/S90-SP**	AWM TPU Black, 4x26 AWG, 90 °C, 125 VAC/ VDC, 4 A, 4.2 mm OD, for repetitive motion 3-wire applications, snap lock coupling nut	1. BN 3. BU 4. BK	Female  Male 
PSG ..  PSW .. 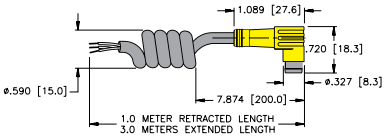	**PKG 4Z-3/S90-SP** **PKW 4Z-3/S90-SP**	**PSG 4-3/S90-SP** **PSW 4-3/S90-SP**	AWM TPU Black, 4x26 AWG, 90 °C, 125 VAC/ VDC, 2 A, 4.2 mm OD, for repetitive motion 4-wire applications, snap lock coupling nut	1. BN 2. WH 3. BU 4. BK	Female  Male 

* Length in meters. Standard cable length is 3 meters. Consult factory for other lengths.
** Locking sleeve material is POM.."PKG(W)..Z".

We reserve the right to make technical alterations without prior notice.

3 and 4-Wire Spiral Cordsets, Threaded Coupling Nut

- NEMA 1, 3, 4, 6P
- IEC IP67 Protection
- 125 VAC/VDC, 4 A (3-pin) and 2 A (4-pin)

Connector Style	Female Part Number	Male Part Number	Features	Pinout	
PKG ..Z** 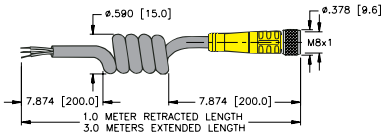 PKW ..Z** 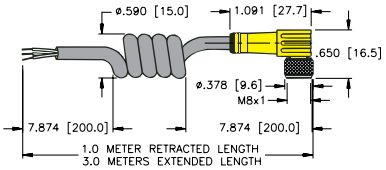 	**PKG 3M-3/S90-SP** **PKW 3M-3/S90-SP**	**PSG 3M-3/S90-SP** **PSW 3M-3/S90-SP**	AWM TPU Black, 4x26 AWG, 90 °C, 125 VAC/ VDC, 4 A, 4.2 mm OD, for repetitive motion 3-wire applications, threaded coupling nut	1. BN 3. BU 4. BK	Female  Male 
PSG .. 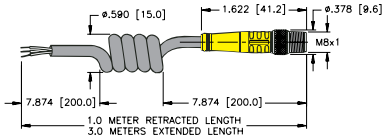 PSW .. 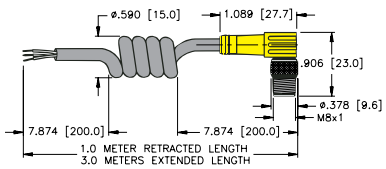 	**PKG 4M-3/S90-SP** **PKW 4M-3/S90-SP**	**PSG 4M-3/S90-SP** **PSW 4M-3/S90-SP**	AWM TPU Black, 4x26 AWG, 90 °C, 125 VAC/ VDC, 2 A, 4.2 mm OD, for repetitive motion 4-wire applications, threaded coupling nut	1. BN 2. WH 3. BU 4. BK	Female  Male 

* Length in meters. Standard cable length is 3 meters. Consult factory for other lengths.
** Locking sleeve material is POM.."PKW..Z".

We reserve the right to make technical alterations without prior notice.