

Relay Sockets OT Series



socketrac

Description

8 and 11 Pin Octal Sockets, DIN Rail Mountable

Electrical Rating

- OT08, OT08-PC - 600 Volts, 10 Amps
- OT11, OT11-PC - 300 Volts, 10 Amps

Construction

- Contacts** • Brass, Nickel Plated
- Screws** • Binder Head, 6 - 32 x 1/4" Steel, Zinc Plated
- Pressure Clamp, 6 - 32 x 5/16" Steel, Zinc Plated, Wire Range #12 - #20 Solid or Stranded
- Molding** • Break Resistant Thermoplastic Black Standard, Grey Available

- ### Agency Approvals
- UL recognized, File No. E60008
 - CSA certified, File No. LR29513
 - CE
 - ROHS




OT Series Ordering Code

Part #	Description	Terminal Type
OT08	DPDT, 8 Pin Octal (Fig. 1)	Binder Head Screws
OT08-PC	DPDT, 8 Pin Octal (Fig. 1)	Pressure Clamp Screws
OT11	3PDT, 11 Pin Octal Style (Fig. 2)	Binder Head Screws
OT11-PC	3PDT, 11 Pin Octal Style (Fig. 2)	Pressure Clamp Screws

Accessories

Part #	Description
	(Refer to the accessories pages 24-31)
C-103-PM	Prepunched Aluminum DIN Rail (1 Meter Lengths)
C-108-PM	Prepunched Raised Aluminum DIN Rail (1 Meter Lengths)
C-108-2PM	Prepunched Raised Aluminum DIN Rail (2 Meter Lengths)

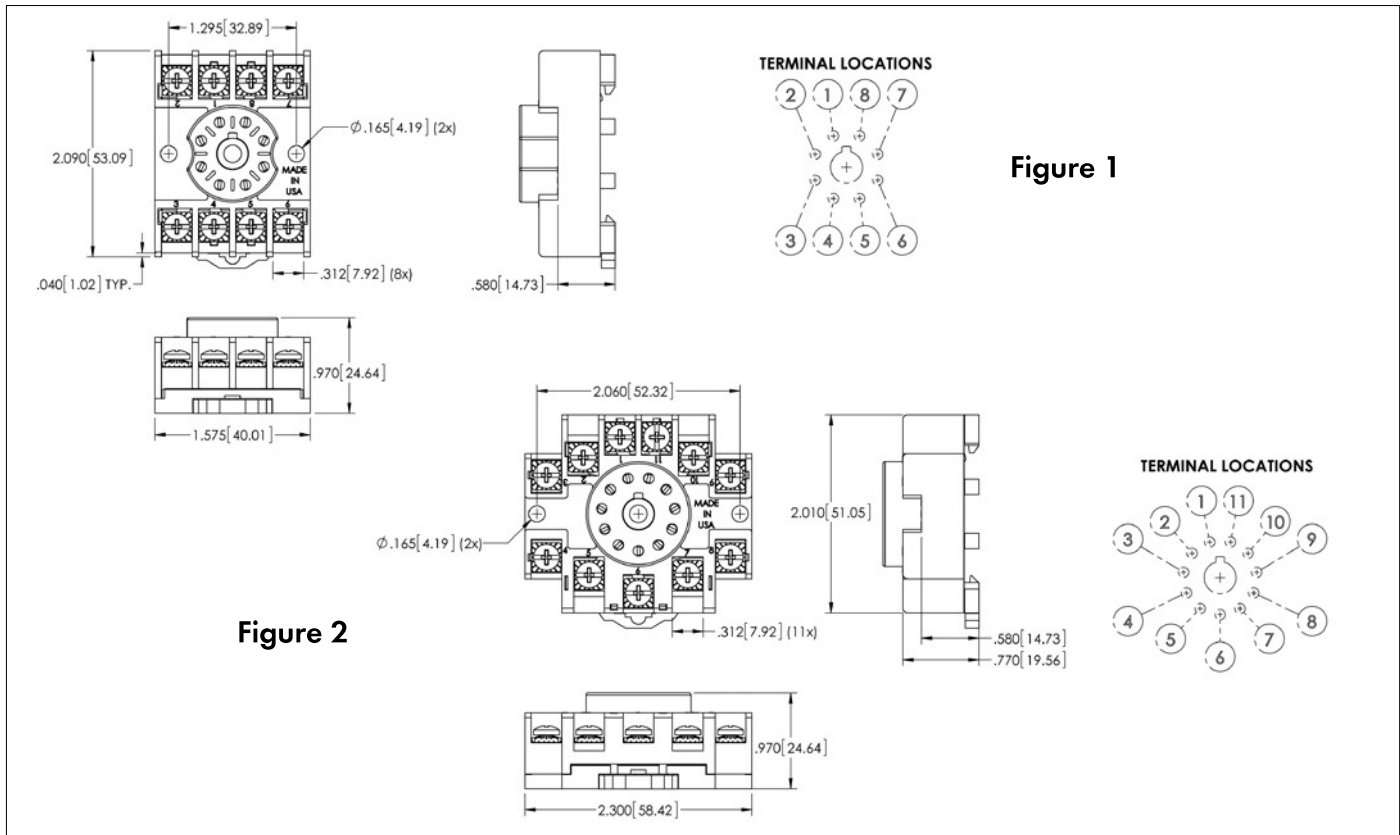

www.CustomConnector.com | sales@customconnector.com

Phone (216) 241-1679 | Fax (216) 241-5529