



SPECIFICATIONS						
NYLON OR TPU						
TPU/YELLOW						
BRASS/GOLD						
BRASS/NICKEL						
4.0 A						
250 V						
PVC/YELLOW						
PVC						
3x22 AWG						
-40°C to +105°C (-40°F to +221°F)						
NEMA 1,3,4,6P AND IEC IP67, IP68, IP69K						

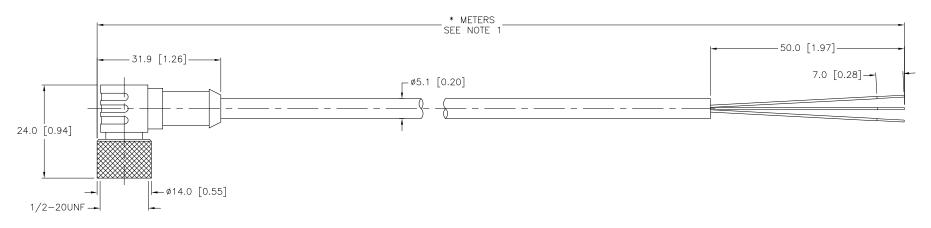



CABLE LENGTH	TOLERANCE
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

- 1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- 2. STRIP AND TIN LENGTHS ARE FOR REFERENCE ONLY; SOME LENGTHS MAY NOT BE STRIPPED AND TINNED.

D	DRAWING PROCESSED AS PART OF ECO 33971	СВМ	04/06/11	33971
REV	DESCRIPTION	BY	DATE	ECO NO.

	RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	High Technology	RCK Inc Sensors and Automation Controls	3000 CAMPUS MINNEAPOLIS, MN 1-800-544-7 (763) 553-7 (763) 553-0 turck.com	55441 7769 300 708 fax
	MATERIAL		DRFT JBJ	DATE 12/18/00	DESCRIPTION WKB .3	7 ⊤ *	
	SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS	DSGN	SCALE 1=1.0	WND) -:	
		DRAWING ARE FOR REFERENCE ONLY	UNIT OF ME	ASUREMENT	URENTERO TROVENIO		55.7
	FINISH			TO LINOUI I	IDENTIFICATION NO.		REV
		CONTACT TURCK FOR MORE	MILLIMETE	ER [INCH]			
1	SEE SPECIFICATIONS	INFORMATION					
).			DO NOT SCALE	THIS DRAWING	FILE: 777000166	SHEET	1 OF 1