SIEMENS

Data sheet 3RA1315-8XB30-1AK6



Figure similar


Reversing contactor assembly AC-3, 3 kW/400 V, 3-pole Size S00, Screw terminal 110 V AC 50 Hz/120 V AC 60 Hz Electrical and mechanical interlock !!! Phased-out product !!! Successor is SIRIUS 3RA2 Preferred successor type is >>3RA2315-8XB30-1AK6<<


size of contactor	S00
product function	Reversing contactor
protection class IP on the front	IP20
reference code acc. to IEC 81346-2	Q
Substance Prohibitance (Date)	01.07.2006 00:00:00
ambient temperature during operation	-25 ... +60 °C
operational current at AC-3 at 400 V rated value	7 A
operating power at AC-3 at 400 V rated value	3 kW
type of voltage of the control supply voltage	AC
control supply voltage 1 at AC	
● at 50 Hz rated value	120 V
● at 60 Hz rated value	120 V
control supply voltage frequency	
● **1 rated value**	60 Hz
● **2 rated value**	60 Hz
number of NC contacts for auxiliary contacts per direction of rotation	0
number of NO contacts for auxiliary contacts per direction of rotation	0
fastening method	screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 50022
height	67 mm
width	90 mm
depth	72 mm
type of electrical connection for main current circuit	screw-type terminals

Further information

Information- and Downloadcenter (Catalogs, Brochures,…)
https://www.siemens.com/ic10
Industry Mall (Online ordering system)
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RA1315-8XB30-1AK6
Cax online generator
http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RA1315-8XB30-1AK6
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
https://support.industry.siemens.com/cs/ww/en/ps/3RA1315-8XB30-1AK6
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)
http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RA1315-8XB30-1AK6&lang=en
Characteristic: Tripping characteristics, I²t, Let-through current
https://support.industry.siemens.com/cs/ww/en/ps/3RA1315-8XB30-1AK6/char
Further characteristics (e.g. electrical endurance, switching frequency)
http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RA1315-8XB30-1AK6&objecttype=14&gridview=view1

Subject to change without notice
© Copyright Siemens

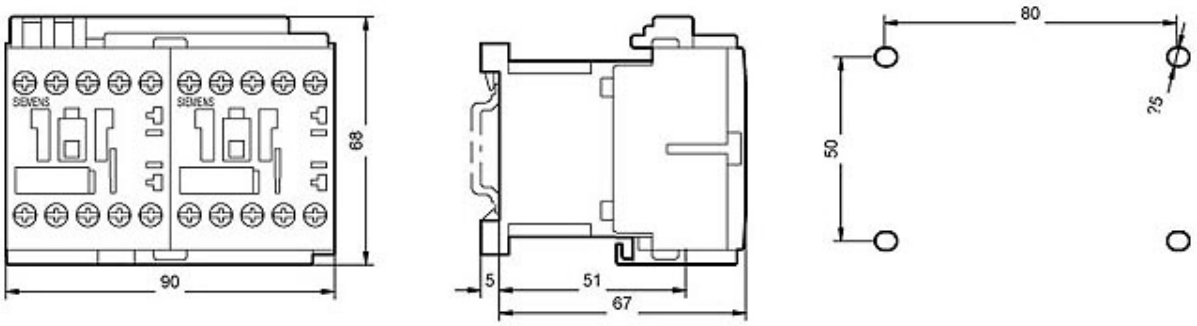

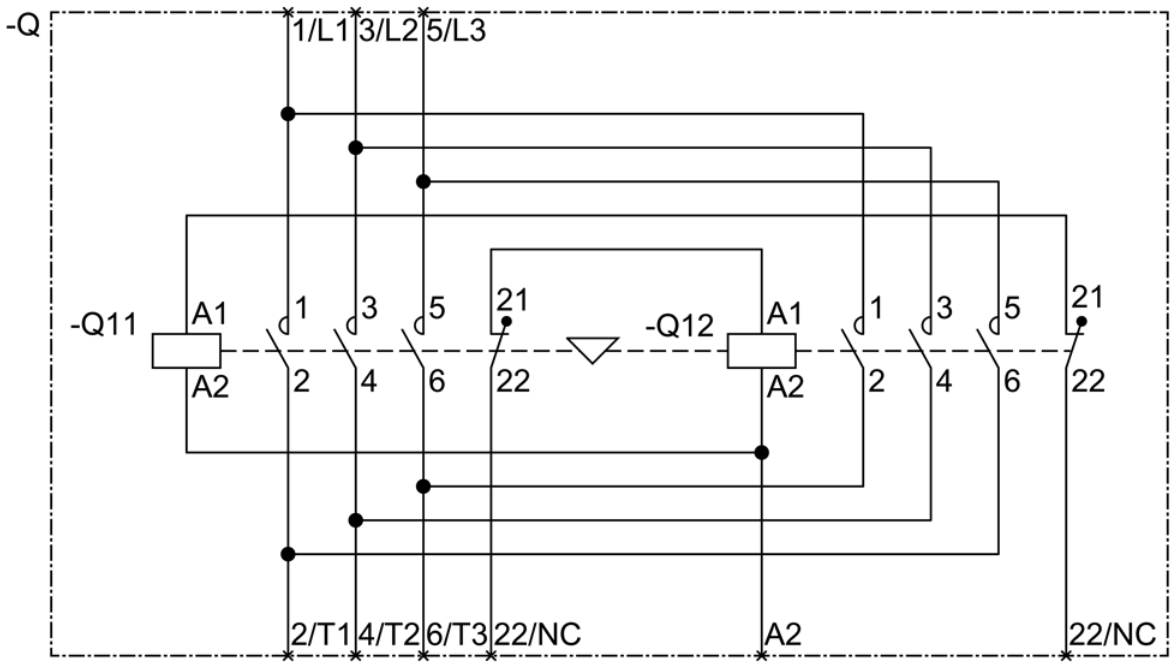

last modified: 2/27/2021

Subject to change without notice
© Copyright Siemens