SIEMENS

Data sheet 3RT1015-1AK62



Figure similar

Power contactor, AC-3 7 A, 3 kW / 400 V 1 NC, 110 V AC 50 Hz/120 V, 60 Hz 3-pole, Size S00 Screw terminal !!! Phased-out product !!! Successor is SIRIUS 3RT2 Preferred successor type is >>3RT2015-1AK62<<

product brand name	SIRIUS
product designation	power contactor
General technical data	
size of contactor	S00
degree of pollution	3
protection class IP	
● on the front	IP20
● of the terminal	IP20
mechanical service life (switching cycles)	
● of contactor typical	30 000 000
● of the contactor with added electronically optimized auxiliary switch block typical	5 000 000
● of the contactor with added auxiliary switch block typical	10 000 000
reference code acc. to IEC 81346-2	Q
Substance Prohibitance (Date)	01.07.2006 00:00:00
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
● during operation	-25 ... +60 °C
Main circuit	
number of poles for main current circuit	3
number of NO contacts for main contacts	3
number of NC contacts for main contacts	0
operational current	
● at AC-1 at 400 V at ambient temperature 40 °C rated value	18 A
● at AC-1	
— up to 690 V at ambient temperature 40 °C rated value	18 A
— up to 690 V at ambient temperature 60 °C rated value	16 A
● at AC-3	
— at 400 V rated value	7 A
● at AC-4 at 400 V rated value	6.5 A
operational current	
● at 1 current path at DC-1	
— at 24 V rated value	15 A
— at 110 V rated value	1.5 A

Subject to change without notice
© Copyright Siemens

● with 2 current paths in series at DC-1	
— at 24 V rated value	15 A
— at 110 V rated value	8.4 A
● with 3 current paths in series at DC-1	
— at 24 V rated value	15 A
— at 110 V rated value	15 A
operational current	
● at 1 current path at DC-3 at DC-5	
— at 24 V rated value	15 A
— at 110 V rated value	0.1 A
● with 2 current paths in series at DC-3 at DC-5	
— at 24 V rated value	15 A
— at 110 V rated value	0.25 A
● with 3 current paths in series at DC-3 at DC-5	
— at 24 V rated value	15 A
— at 110 V rated value	15 A
operating power	
● at AC-1	
— at 400 V rated value	11 kW
● at AC-2 at 400 V rated value	3 kW
● at AC-3	
— at 400 V rated value	3 kW
— at 500 V rated value	3.5 kW
— at 690 V rated value	4 kW
Control circuit/ Control	
type of voltage of the control supply voltage	AC
control supply voltage at AC	
● at 50 Hz rated value	110 V
● at 60 Hz rated value	120 V
control supply voltage frequency	
● 1 rated value	50 Hz
● 2 rated value	60 Hz
operating range factor control supply voltage rated value of magnet coil at AC	
● at 50 Hz	0.85 ... 1.1
● at 60 Hz	0.8 ... 1.1
apparent pick-up power of magnet coil at AC	31.7 V·A
inductive power factor with closing power of the coil	0.77
apparent holding power of magnet coil at AC	5.1 V·A
inductive power factor with the holding power of the coil	0.27
Auxiliary circuit	
number of NC contacts for auxiliary contacts instantaneous contact	1
number of NO contacts for auxiliary contacts instantaneous contact	0
operational current at AC-12 maximum	10 A
operational current at AC-15	
● at 230 V rated value	6 A
● at 400 V rated value	3 A
operational current at DC-12	
● at 60 V rated value	6 A
● at 110 V rated value	3 A
● at 220 V rated value	1 A
operational current at DC-13	
● at 24 V rated value	10 A
● at 60 V rated value	2 A
● at 110 V rated value	1 A
● at 220 V rated value	0.3 A
contact reliability of auxiliary contacts	1 faulty switching per 100 million (17 V, 1 mA)
Short-circuit protection	

Subject to change without notice
© Copyright Siemens

design of the fuse link	
● for short-circuit protection of the main circuit	
— with type of coordination 1 required	fuse gL/gG: 35 A
— with type of assignment 2 required	fuse gL/gG: 20 A
● for short-circuit protection of the auxiliary switch required	fuse gL/gG: 10 A
Installation/ mounting/ dimensions	
fastening method	screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 50022
● side-by-side mounting	Yes
height	57.5 mm
width	45 mm
depth	72 mm
required spacing for grounded parts at the side	6 mm
Connections/ Terminals	
type of electrical connection	
● for main current circuit	screw-type terminals
● for auxiliary and control circuit	screw-type terminals
type of connectable conductor cross-sections	
● for main contacts	
— solid	2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²), max. 2x (0.75 ... 4 mm²)
— solid or stranded	2x (0,5 ... 1,5 mm²), 2x (0,75 ... 2,5 mm²), max. 2x (0,75 ... 4 mm²)
— finely stranded with core end processing	2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²)
● at AWG cables for main contacts	2x (20 ... 16), 2x (18 ... 14), 1x 12
type of connectable conductor cross-sections	
● for auxiliary contacts	
— solid	2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²), max. 2x (0.75 ... 4 mm²)
— finely stranded with core end processing	2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²)
● at AWG cables for auxiliary contacts	2x (20 ... 16), 2x (18 ... 14), 1x 12

Certificates/ approvals

General Product Approval				EMC	Test Certificates
CSA	CCC	UL	EAC	RCM	Type Test Certificates/Test Report

Test Certificates	Marine / Shipping				
Special Test Certificate	ABS	LRS	PRS	RINA	RMRS

Marine / Shipping	other				Railway
DNV·GL	Confirmation	Miscellaneous	Confirmation	Miscellaneous	Special Test Certificate

Further information

Information- and Downloadcenter (Catalogs, Brochures,…)
https://www.siemens.com/ic10
Industry Mall (Online ordering system)
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT1015-1AK62
Cax online generator
http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT1015-1AK62
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


Subject to change without notice
© Copyright Siemens

https://support.industry.siemens.com/cs/ww/en/ps/3RT1015-1AK62


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)
http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT1015-1AK62&lang=en

Characteristic: Tripping characteristics, I²t, Let-through current
https://support.industry.siemens.com/cs/ww/en/ps/3RT1015-1AK62/char

Further characteristics (e.g. electrical endurance, switching frequency)
http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT1015-1AK62&objecttype=14&gridview=view1

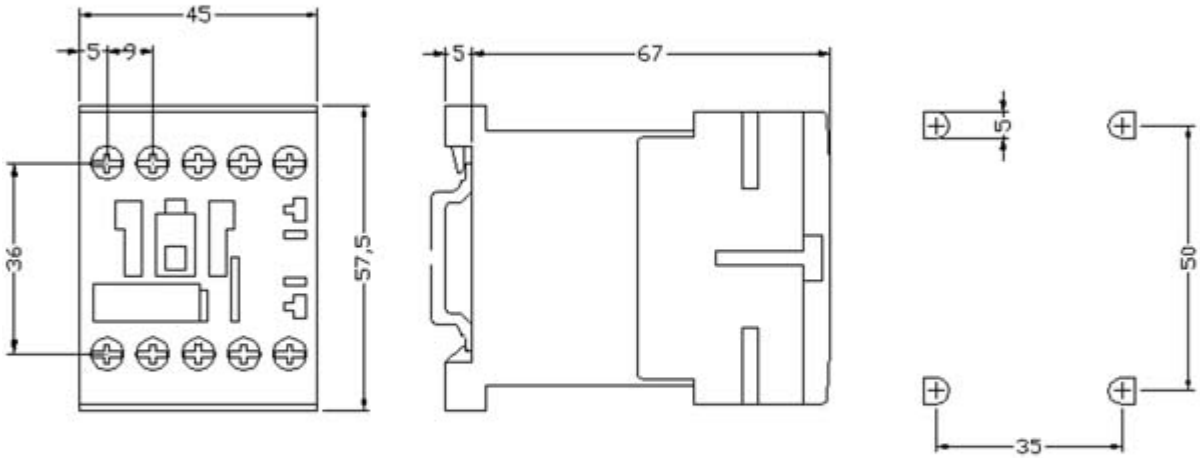

Subject to change without notice
© Copyright Siemens

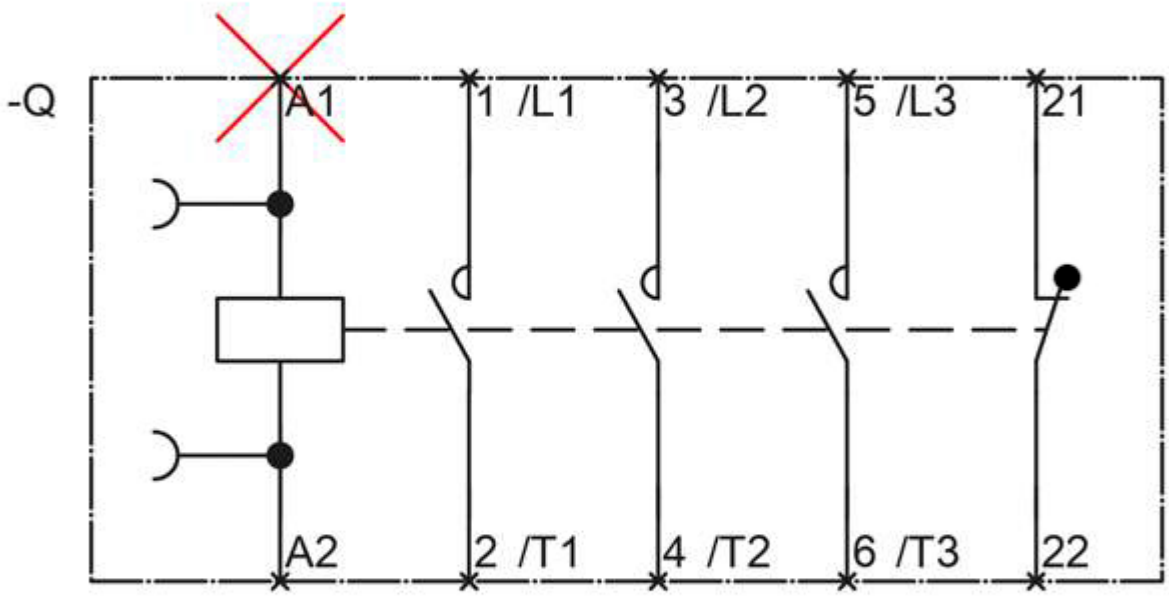

last modified: 2/28/2021

Subject to change without notice
© Copyright Siemens